

IP multi-channel Datalogger

DATA ACQUISITION | HYDROLOGY | GROUNDWATER | FLOOD | WATER QUALITY

General Description

HyQuest Solutions' IP datalogger iRIS 350FX has been designed and constructed for **use in harsh outdoor and industrial environments**. It is **compact, cost effective and easily configured**, with support for a wide range of instrumentation. The communication slots support wireless 3G modem, Iridium satellite, ethernet, RS232, SDI-12 and modbus slave protocol for SCADA. An integral wireless modem provides network connectivity.

Configuration & Data Download

iRIS 350FX is configured locally via RS232 connection using HyQuest Solutions' **free-of-charge iLink software** (Windows, Android). iLink is used to configure and check monitored values and to download data from the iRIS 350FX. The optional HydroTel™ telemetry software can be used for remote configuration and downloading.

Options for data access / download

- Direct RS232 connection e.g. laptop, data radio or bluetooth adaptor
- FTP file transfer (up to 2 pre-configured locations)
- IP based packet transfer (TCP/UDP)
- SMS text back (current sensor values)
- Voice annunciation (iRIS 350FXV only)

Main Features

- Aluminium die-cast housing
- IP67
- Low power consumption, battery operated, solar chargeable (optional solar panel available)
- Up to 20 virtual sensors
- 40 alarms that can be assigned to any virtual sensor
- Non-volatile memory
- Security: Configurable with a pin-code to prevent unauthorized access to information
- Small graphics LCD display and 4 button keypad for viewing general and sensor information, running totals, etc.

Applications

The iRIS 350FX is especially suitable for

- Data Acquisition
- Hydrometric Stations
- Automatic Weather Stations
- Environmental Monitoring
- Agrometeorological Monitoring



Technical Specifications

Digital Input/Output

- 4 x digital I/O channels (configurable)
- Inputs: clean contact to 0 V **or** 3.6-12 V DC referenced to GND
- Outputs: switched 12 V **or** open-drain sinking to 0 V, both limited to 100 mA

Analogue Input/Output

- 4 analogue Inputs: uni-polar, 16 bit resolution, 30 V DC surge-protection
- Input ranges: 0-1.25 V, 0-2.5 V and 0-5 V
- Internal 100 Ω sink resistors allow use of input current (0/4-20 mA).
- 1 analogue (excitation) output for energizing passive instruments (e.g. potentiometer type wind vanes) or alternatively for sending a derived analogue signal to other equipment, selectable as 0-5 V or 4-20 mA

Communications

- Non-isolated DTE RS232 at 1200-115200 bps (default 38400 bps)
- Wireless 3G modem or a custom comms module on PCB Rev 1.2+
- SDI12 instrumentation port, complies with SDI12 V1.3
- Serial VGA camera proprietary connection (3.3 V CMOS levels)

Power Supply

- Internal/external 12 V rechargeable SLA battery, integral charger 15-30 V DC input, optional: solar panel (easily pluggable without additional regulator)
- Lowest power mode current 3 mA
- Over voltage and reverse polarity protected with self-resetting fuse
- Voltage of battery and charger input: monitored, logged, displayed, alarmed

Data Storage: Flash Memory

- Total 16 MB, of which 8 MB allocated to logged data/stored images (1,084,576 samples), or audio file storage for up to two languages (IRIS 350FXV only)
- Typical autonomy: 2 parameters logged every 15 minutes and battery voltage logged hourly will give almost 12 years of storage.

Status LEDs

- 1 tri-colour LED for overall operational state
- 8 LEDs for status of communication devices (I/O status and communication activity)

Real-time Clock / Calendar

- High accuracy, backed by on-board lithium battery to prevent loss of date/time

Environmental Conditions

- Enclosure: IP67, die-cast aluminium alloy, hard grey paint finish, neoprene gasket
- Operating temperature: 14 °F to +158 °F (-10 °C to +70 °C)
- Storage temperature: -22 °F to +185 °F (-30 °C to +85 °C)




Size (W x H x D) and Mass

6.29 in x 5.11 in x 2.75 in (160 x 130 x 70 mm); 2.86 lb (1.3 kg) incl. internal SLA battery

Conformity / Compliance

RoHS, FCC, CE (WEEE pending)

Software: iLink & HydroTel™

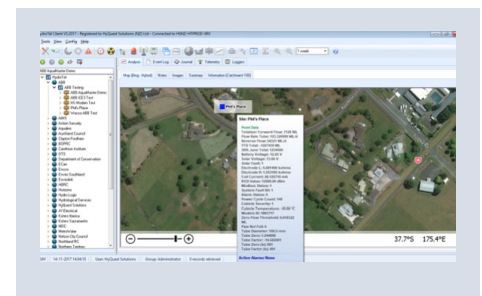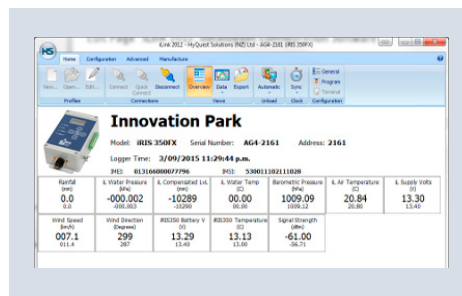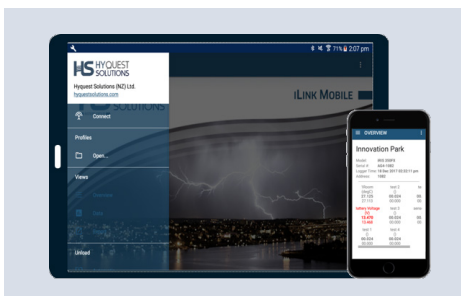

Contact us

HyQuest Solutions America - KISTERS Group

3550 23rd Ave S. Suite 5
Lake Worth Beach, FL 33461

+1 (561) 459-4876
+1 (561) 582-0049

sales-hsa@kisters.net
www.hyquestolutionsamerica.com

